

PRODUCT INFORMATION

REMOVABLE BOLLARDS

Description:

Removable bollard locks into galvanized sleeve which is epoxyed into the core drilled hole.

High Security Locks.

Handles for OH&S.

Materials:

90mm diameter bollard.

Standard removable bollard has a 6mm wall thickness.


Heavy duty removable bollard has a 10.4mm wall thickness.

Stainless steel locking mechanism.

Finish:

Powder coated safety yellow or black. Other colours available.

REMOVABLE BOLLARDS

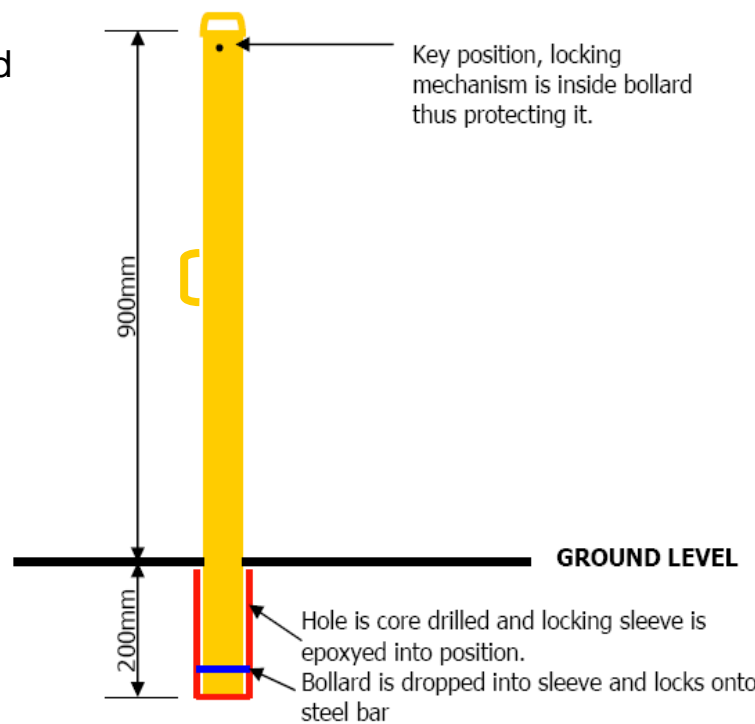

Storage stand for bollard when not in use



Bollard in storage stand



Locking Sleeve which is epoxyed into core drilled hole. Bollard locks onto bar.

PO BOX 1245, Cleveland, 4163, QLD

PH: (07) 3286 7070

FAX: (07) 3286 7334

